

Motive Battery

Energy Storage Battery

Reserve Battery

Motorcycle Battery



Industry Battery-General Purpose AGM Battery-TN Series

TN6-3.2B

(6V 3.2Ah)

GENERAL FEATURES

- ◆ Oxygen recombination technology: maintenance-free, no need to add water or acid
- ◆ The patent grid alloy: less gassing, low self-discharge, excellent corrosion resistance
- ◆ Design life is 3~5 years at 25°C under standby application, deep discharge recoverability
- ◆ High quality AGM separator: extend cycle life and prevent micro short circuit
- ◆ ABS container: increase the strength of battery (Flame-retardant ABS UL94-V0 is optional)



Application

- ◆ Uninterrupted Power Supply (UPS)
- ◆ Communications and electric equipment
- ◆ Emergency lighting equipment
- ◆ Fire alarm and security system
- ◆ Control equipment, and other factory automation equipment
- ◆ Emergency power supply (EPS)
- ◆ Portable VTR/TV, radio and so on
- ◆ Power tools, lawn mowers, vacuum cleaners
- ◆ Cameras and photographic equipment
- ◆ Portable measuring equipment
- ◆ Portable telephone sets
- ◆ Various power toys and hobby equipment
- ◆ Lighting equipment

Dimension



Unit:mm

Length 70±2mm / 2.76inch

Width 47±2mm / 1.85inch

Container Height 100±3mm / 3.94inch

Total Height 106±3mm / 4.17inch

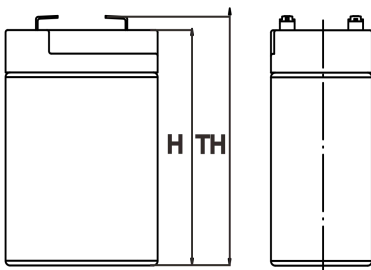

Terminal

Unit:mm


Terminal Type: T1

Weight

0.68kg

1.5lbs

T1



ISO9001 ISO14001 OHSAS18001

This document is subject to change without prior notification

- Motive Battery
- Energy Storage Battery
- Reserve Battery
- Motorcycle Battery



TN6-3.2B

Specificaion

Nominal Voltage	6V	
Rated Capacity(25°C)	3.20Ah	20hr Rate (1.80V/cell)
	2.98Ah	10hr Rate (1.80V/cell)
	2.73Ah	5hr Rate (1.75V/cell)
	2.46Ah	3hr Rate (1.70V/cell)
	1.97Ah	1hr Rate (1.60V/cell)
Container Material	ABS (Flame-retardant ABS UL94-V0 is optional)	
Operating Temperature Range	Discharge	-20 ~ +50°C
	Charge	0 ~ +40°C
	Storage	-15 ~ +40°C
Capacity Effected by Temperature	40°C / 104°F	106%
	25°C / 77°F	100%
	0°C / 32°F	86%
	-10°C / 14°F	65%
Charge	Float Voltage	2.23 -2.27V/cell@25°C, Tem.Coefficient : -3mV/cell/°C
	Equalize Voltage	2.35 -2.40V/cell@25°C, Tem.Coefficient : -3mV/cell/°C
	Cycle Voltage	2.40 -2.50V/cell@25°C, Tem.Coefficient : -5mV/cell/°C
Max. Charging Current	0.96A (0.3C)	
Max. Discharge Current (5S)	48A	
Internal Resistance	28mΩ	
Self-Discharge	<3%, TN series stored at 25 °C require a supplementary charge every six months, the charging interval would shrink when the ambient temperature went higher	

Discharge Performance

Constant Current Discharge Table (25°C/77°F) Unit: A															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	6.1	4.3	3.5	3.1	2.5	1.9	1.57	0.96	0.73	0.60	0.51	0.44	0.35	0.287	0.158
1.80V/cell	7.6	5.1	4.1	3.5	2.7	2.1	1.68	1.02	0.77	0.63	0.53	0.46	0.36	0.298	0.160
1.75V/cell	9.0	5.8	4.5	3.8	2.9	2.2	1.78	1.07	0.79	0.65	0.55	0.47	0.37	0.303	0.162
1.70V/cell	10.2	6.4	4.9	4.1	3.1	2.3	1.85	1.11	0.82	0.67	0.56	0.48	0.38	0.308	0.164
1.67V/cell	11.2	6.9	5.2	4.3	3.2	2.4	1.93	1.14	0.84	0.68	0.57	0.49	0.38	0.313	0.167
1.60V/cell	11.8	7.1	5.4	4.4	3.3	2.4	1.97	1.18	0.86	0.70	0.58	0.50	0.39	0.318	0.168

Constant Power Discharge Table (25°C/77°F) Unit: W															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	11.6	8.2	6.8	5.9	4.8	3.7	3.04	1.87	1.43	1.18	1.00	0.87	0.70	0.580	0.320
1.80V/cell	14.1	9.6	7.8	6.7	5.3	4.0	3.26	1.98	1.49	1.23	1.04	0.91	0.72	0.597	0.322
1.75V/cell	16.5	10.8	8.5	7.2	5.6	4.2	3.41	2.05	1.54	1.26	1.06	0.92	0.73	0.605	0.322
1.70V/cell	18.5	11.8	9.2	7.7	5.8	4.4	3.53	2.12	1.58	1.29	1.08	0.94	0.74	0.611	0.326
1.67V/cell	20.1	12.5	9.6	8.0	6.0	4.5	3.66	2.17	1.61	1.31	1.10	0.95	0.75	0.617	0.329
1.60V/cell	20.8	12.9	9.9	8.1	6.1	4.6	3.71	2.22	1.64	1.33	1.12	0.97	0.76	0.624	0.330

动力电池

储能电池

备用电池

摩托车电池



阀控式免维护铅酸蓄电池 - 通用型

TN6-3.2B

(6V 3.2Ah)



产品特点

- ◆ 阀控式免维护设计，寿命期间无需加水或加酸
- ◆ 专利稀土合金板栅，减少气体产生，自放电率低，抗腐蚀能力出众
- ◆ 在25°C下，产品浮充设计寿命为3~5年，优良的深放电恢复能力
- ◆ 高质量AGM隔板：防止微短路，延长循环寿命
- ◆ ABS壳盖：电池外壳强度高（阻燃壳体UL94-V0可选）

尺寸

单个尺寸

长	70±2mm
宽	47±2mm
高	100±3mm
总高	106±3mm

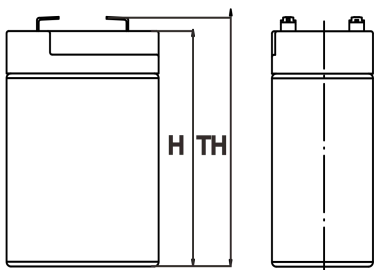

产品应用

- ◆ 不间断电源(UPS)
- ◆ 通信和电力设备
- ◆ 紧急照明设备
- ◆ 火灾报警及安防系统
- ◆ 控制设备及其他机械自动化设备
- ◆ 应急电源系统
- ◆ 便携式音频设备
- ◆ 电动工具，割草机，真空吸尘器
- ◆ 照相设备
- ◆ 便携式测量工具
- ◆ 便携式通话设备
- ◆ 各式电动玩具及娱乐设施
- ◆ 照明设备

端子类型


单位:mm

端子类型 T1

重量

0.68kg 1.5lbs

T1



ISO9001 ISO14001 OHSAS18001

内容如有改动，恕不另行通知

动力电池

储能电池

备用电池

摩托车电池



TN6-3.2B

规格书

额定电压	6V	
容量(25°C)	3.20Ah	20hr Rate (1.80V/cell)
	2.98Ah	10hr Rate (1.80V/cell)
	2.73Ah	5hr Rate (1.75V/cell)
	2.46Ah	3hr Rate (1.70V/cell)
	1.97Ah	1hr Rate (1.60V/cell)
壳体材料	ABS (阻燃ABS壳体可选)	
使用温度范围	放电	-20 ~ +50°C
	充电	0 ~ +40°C
	储存	-15 ~ +40°C
不同温度下 电池容量系数	40°C / 104°F	106%
	25°C / 77°F	100%
	0°C / 32°F	86%
	-10°C / 14°F	65%
充电	浮充电压	2.23 -2.27V/单格@25°C, 温度补偿系数: -3mV/单格/°C
	均充电压	2.35 -2.40V/单格@25°C, 温度补偿系数: -3mV/单格/°C
	循环使用电压	2.40 -2.50V/单格@25°C, 温度补偿系数: -5mV/单格/°C
最大充电电流	0.96A (0.3C)	
最大放电电流 (5S)	48A	
电阻	28mΩ	
自放电	<3%, TN系列储存在25°C时需每6个月进行一次补充充电, 环境温度更高时则充电间隔时间越短	

放电性能

恒电流放电表 (25°C/77°F) 单位: A															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	6.1	4.3	3.5	3.1	2.5	1.9	1.57	0.96	0.73	0.60	0.51	0.44	0.35	0.287	0.158
1.80V/cell	7.6	5.1	4.1	3.5	2.7	2.1	1.68	1.02	0.77	0.63	0.53	0.46	0.36	0.298	0.160
1.75V/cell	9.0	5.8	4.5	3.8	2.9	2.2	1.78	1.07	0.79	0.65	0.55	0.47	0.37	0.303	0.162
1.70V/cell	10.2	6.4	4.9	4.1	3.1	2.3	1.85	1.11	0.82	0.67	0.56	0.48	0.38	0.308	0.164
1.67V/cell	11.2	6.9	5.2	4.3	3.2	2.4	1.93	1.14	0.84	0.68	0.57	0.49	0.38	0.313	0.167
1.60V/cell	11.8	7.1	5.4	4.4	3.3	2.4	1.97	1.18	0.86	0.70	0.58	0.50	0.39	0.318	0.168

恒功率放电表 (25°C/77°F) 单位: W															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	11.6	8.2	6.8	5.9	4.8	3.7	3.04	1.87	1.43	1.18	1.00	0.87	0.70	0.580	0.320
1.80V/cell	14.1	9.6	7.8	6.7	5.3	4.0	3.26	1.98	1.49	1.23	1.04	0.91	0.72	0.597	0.322
1.75V/cell	16.5	10.8	8.5	7.2	5.6	4.2	3.41	2.05	1.54	1.26	1.06	0.92	0.73	0.605	0.322
1.70V/cell	18.5	11.8	9.2	7.7	5.8	4.4	3.53	2.12	1.58	1.29	1.08	0.94	0.74	0.611	0.326
1.67V/cell	20.1	12.5	9.6	8.0	6.0	4.5	3.66	2.17	1.61	1.31	1.10	0.95	0.75	0.617	0.329
1.60V/cell	20.8	12.9	9.9	8.1	6.1	4.6	3.71	2.22	1.64	1.33	1.12	0.97	0.76	0.624	0.330