

Pb-C技术 Lead Carbon technology	AGM技术 AGM separator	多元稀土合金 Multi-element patent rare earth alloy	HRPSoC技术 HRPSoC technology	15%放电循环 15%DOD ≥10000cycles
--	----------------------------------	--	---	--



应用领域 Product Applications

通信 COMMUNICATION	风能 WIND ENERGY
数据中心 Data Center	太阳能 SOLAR ENERGY
不间断电源 UPS	工业 INDUSTRIAL
电力 ELECTRIC POWER	

产品特性 Product Specifications

额定电压 Nominal Voltage	额定容量 Rated Capacity (10hr)	内阻 Internal Resistance	短路电流 Short Circuit Current	推荐使用温度范围 Operating Temp. Range
12V	170Ah/2.04kWh (25°C/77°F, 1.80V/cell)	4.0mΩ@25°C(77°F)	2040A(5s)	放电 Discharge : -15~50°C (5~122°F) 充电 Charge : 0~40°C (32~104°F) 储存 Storage : -15~40°C (5~104°F) 最佳 Optimum : 25±3°C (77±5°F)

物理特性 Physical Specifications

材料 Material	端子 Terminal Type	尺寸 Dimensions				重量 Weight
		长 Length	宽 Width	高 Height	总高 TH	
ABS UL94-HB (阻燃 ABS UL94-V0)	I7	520±2mm (20.47 inch.)	239±2mm (9.41 inch.)	220±2mm (8.66 inch.)	225±2mm (8.86 inch.)	63.0kg 138.9(lbs)


恒流放电参数 Constant Current Discharge(A)@25°C(77°F)

终止电压/时间 F.V / Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	3078	216.2	185.4	165.3	137.4	110.9	92.2	55.5	40.5	33.1	28.5	25.0	20.2	16.7	890
1.80V/cell	3723	250.8	207.1	183.6	147.3	116.5	96.4	58.0	42.4	34.3	29.3	25.6	20.7	17.0	900
1.75V/cell	4261	283.3	229.6	198.1	155.9	122.6	101.0	60.3	44.0	35.2	30.0	26.3	21.1	17.3	912
1.70V/cell	4735	306.0	246.2	211.7	163.5	127.1	104.3	62.7	45.4	36.2	30.7	26.9	21.5	17.5	921
1.67V/cell	5251	326.5	256.4	222.8	171.8	132.4	108.0	64.8	46.6	37.2	31.4	27.5	21.8	17.8	932
1.60V/cell	5553	342.7	269.4	230.8	177.5	136.1	110.5	66.0	47.5	38.2	32.3	28.0	22.1	18.1	944

恒功率放电参数 Constant Power Discharge(W/cell)@25°C(77°F)


终止电压/时间 F.V / Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	574.7	408.5	353.6	318.0	267.3	217.9	181.8	110.3	80.8	66.3	57.2	50.3	40.8	33.8	183
1.80V/cell	686.5	468.0	390.4	349.7	283.7	227.1	189.1	114.6	84.2	68.3	58.6	51.4	41.7	34.3	185
1.75V/cell	770.2	520.1	426.9	372.9	297.8	237.4	197.0	118.7	87.0	69.9	59.7	52.5	42.3	34.8	187
1.70V/cell	837.2	553.2	452.1	395.5	309.9	244.5	202.4	123.0	89.5	71.7	60.9	53.5	43.1	35.4	189
1.67V/cell	911.9	580.9	465.9	412.0	323.4	253.7	208.7	126.5	91.5	73.4	62.1	54.5	43.6	35.9	190
1.60V/cell	945.5	599.8	482.2	422.3	331.4	258.5	212.2	128.0	92.8	74.9	63.7	55.4	44.1	36.3	192

外形尺寸 Battery Dimensions(mm)

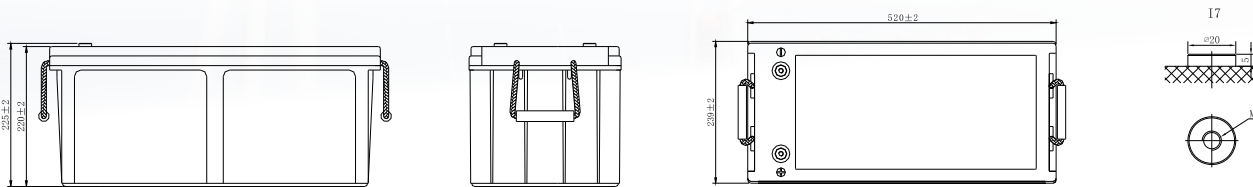


电性能 Electrical Characteristics


不同倍率放电特性 Discharge Characteristics(25°C/77°F)

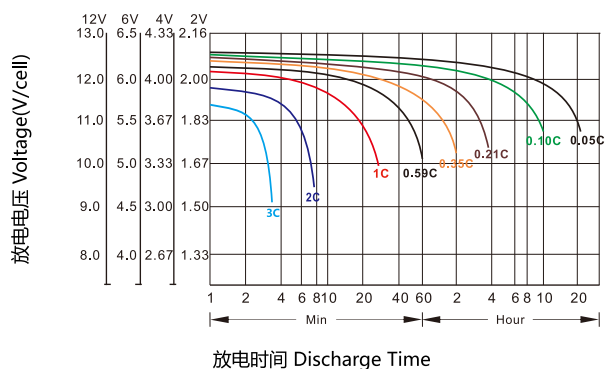


充电特性曲线 Charging Characteristics

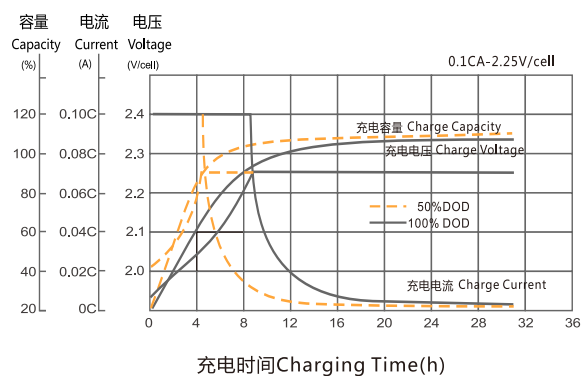


电池容量曲线 Capacity vs Temperature

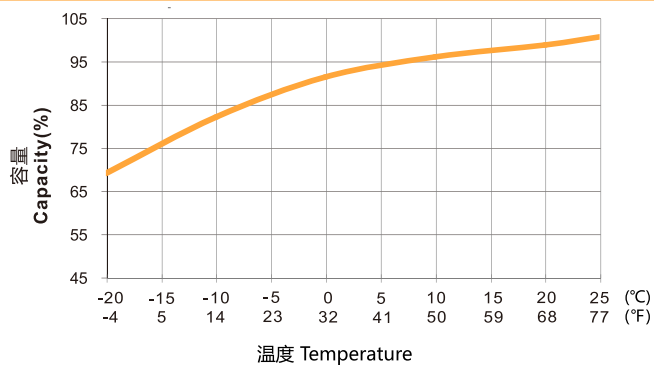


自放电曲线 Self-discharge vs Time

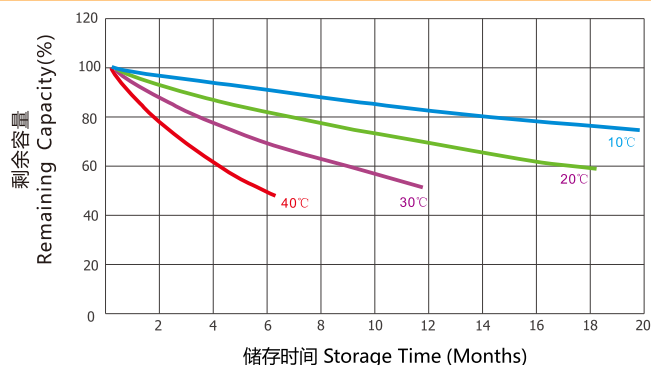

循环次数与放电深度 Cycle Life vs DOD

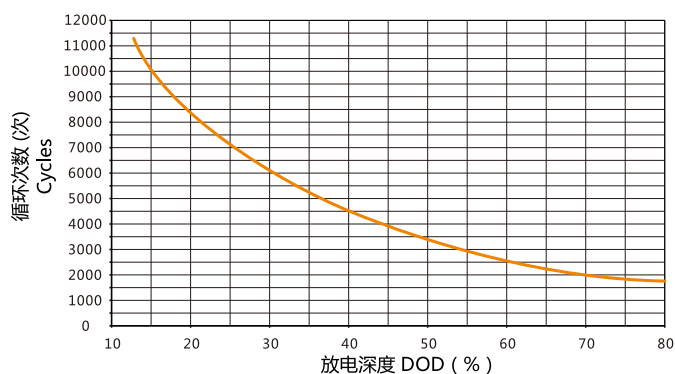

充电时间与放电深度 Charging Time vs DOD

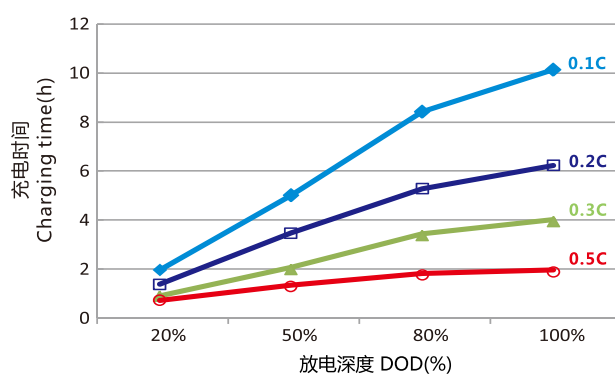

充电电流 Charge Current

限流: $\leq 0.4C_{10A}$
Limited current: $\leq 0.4C_{10A}$

快速充电 Fast Charge

恒压 Constant voltage: 13.8~14.4V@25°C(77°F)
温度补偿系数 Temp. Coefficient: -30mV/°C

浮充充电 Float Charge

恒压 Constant voltage: 13.2~13.8V@25°C(77°F)
温度补偿系数 Temp. Coefficient: -20mV/°C