


TRLiF-4830C (48V30Ah)

Rechargeable Li-ion Battery-Industrial Battery-LFP Series



Product Features

-  Cylindrical LFePO₄ cell-32700 (3.2V 6~6.3Ah), higher reliability
-  Longer cycle life 3500 cycles@80%DOD.
-  Fully replaceable with current batteries (Lead-acid, Ni-Cd)
-  Built-in BMS management system with interface RS485/RS232
-  Maintenance free with standard 19" design easy installation
-  Optimum adaptation to variety applications with series & parallel expansion support

Product Application



Nominal Characteristics

Nominal Voltage	51.2V
Nominal Capacity (@0.2C)	30Ah (16S5P)
Nominal Energy	1536Wh
Internal Resistance	110mΩ
Self Discharge Rate	≤3.5% per month
Cycle Life (@25°C,0.2C,80%DOD)	3500 Cycles
Parallel Connected Function	Max. 16 groups in parallel, recommended ≤ 12 groups
Series Connected Function	Not supported

Charging Specifications

Recommended Charging Voltage	56V~57.6V
Max. Charging Current	10A

Discharging Specifications

Discharging Cut-off Voltage	44.8V
Max. Discharging Continuous Current	20A
Max. Discharging Peak Current	22A, <3S

TRLiF-4830C (48V30Ah)

Rechargeable Li-ion Battery-Industrial Battery-LFP Series




Mechanical Characteristics

Width	483mm (19" Rack mounted type)
Depth	365mm
Height	88mm (2U)
Weight	19.1Kg
Communication Interface	RS485/RS232


Operating Conditions

Charge Temperature	0°C~45°C (32°F~113°F)
Discharge Temperature	-20°C~60°C (-4°F~40°F)
Storage Temperature	0°C~45°C (32°F~113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP30


Rating Performance @25°C

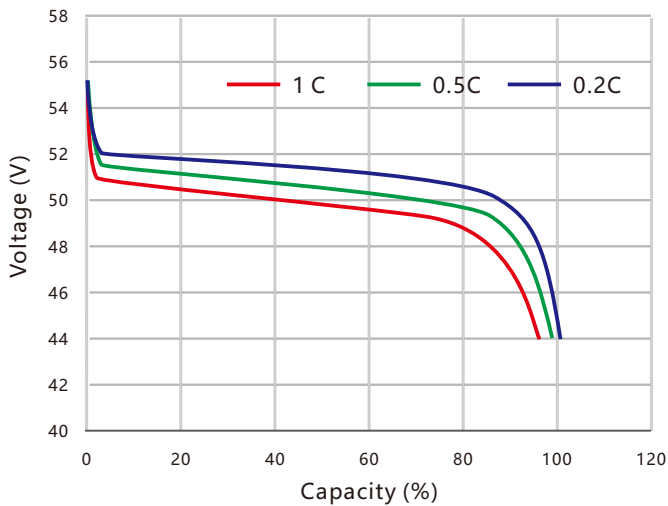

Discharge and Charge @25°C, 0.2C

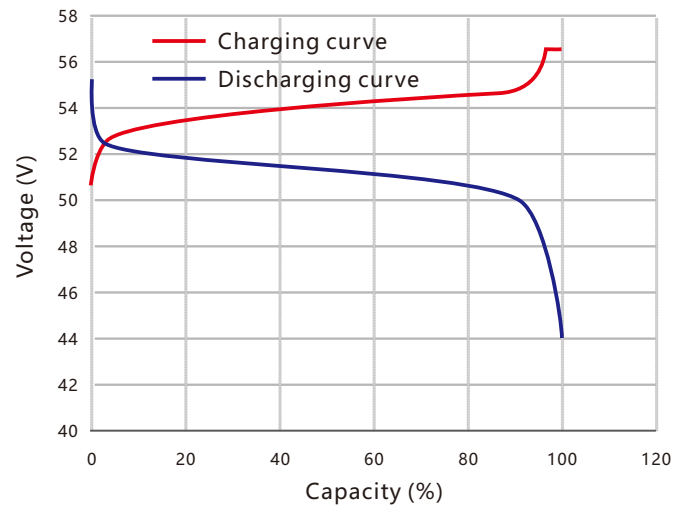

Capacity under different Temp.

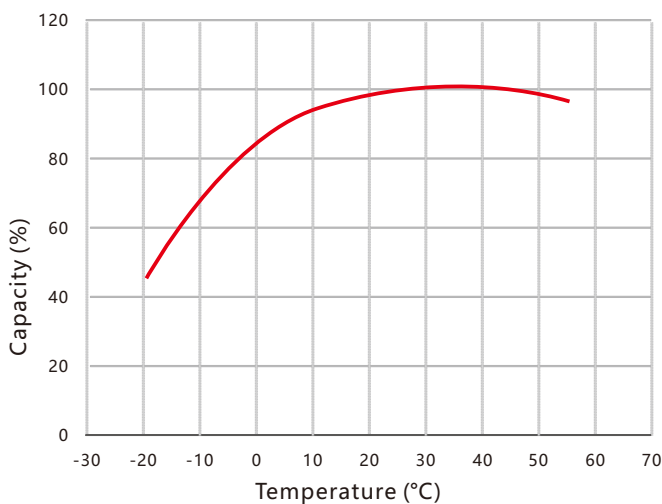

Cycle Life under different Temp.

