

■ Motive Battery

□ Energy Storage Battery

□ Reserve Battery

□ Motorcycle Battery



### Motive Battery-Deep Cycle Type-TNE Series

# TNE12-52

## (12V 52Ah)

### GENERAL FEATURES


- Oxygen recombination technology: Maintenance Free VRLA Battery, no need to add water or acid
- The patent grid alloy: less gassing, low self-discharge, excellent corrosion resistance performance
- Special paste formula: additives are added to improve deep discharge, long cycle life
- High quality AGM separator: extend cycle life and prevent micro short circuit
- The patent Nano silica gel electrolytes, extend cycle life and improve the deep discharge performance
- ABS container: increase the strength of battery (Flame-retardant ABSUL94-V0 is optional)



### Dimension

Unit:mm

Length	224±2mm	/	8.82inch
Width	120±2mm	/	4.72inch
Container Height	171±2mm	/	6.73inch
Total Height	176±2mm	/	6.93inch

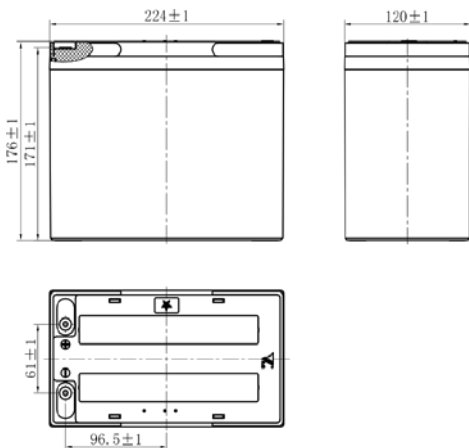

### Application

- Electric tools or toys
- Electric Bicycle/Tricycle
- Golf trolleys and golf cart
- Patrol car
- Electric Sight-seeing Tour Bus
- Sweeper
- Wheelchairs
- Lawn mowers
- Illumination light


### Terminal

Unit:mm

Terminal Type: I1

### Weight

13kg 28.66lbs



ISO9001 ISO14001 OHSAS18001

This document is subject to change without prior notification

- Motive Battery
- Energy Storage Battery
- Reserve Battery
- Motorcycle Battery




## TNE12-52

### Specificaion


<b>Nominal Voltage</b>	12V	
<b>Nominal Capacity</b>	52Ah	
<b>Rated Capacity (25°C)</b>	<b>C20(1.80V/cell)</b>	52Ah
	<b>C10(1.80V/cell)</b>	50Ah
	<b>C5(1.75V/cell)</b>	48Ah
	<b>C3(1.75V/cell)</b>	45Ah
<b>Container Material</b>	ABS (Flame-retardant ABSUL94-V0 is optional)	
<b>Operating Temperature Range</b>	<b>Discharge</b>	-20 ~ +50°C
	<b>Charge</b>	0 ~ +40°C
	<b>Storage</b>	-15 ~ +40°C
<b>Capacity Effected by Temperature</b>	<b>40°C / 104°F</b>	106%
	<b>25°C / 77°F</b>	100%
	<b>0°C / 32°F</b>	86%
	<b>-10°C / 14°F</b>	65%
<b>Charge Method</b>	Please refer to the "Charge Characteristics (25°C)" below	
<b>Monthly Self Discharge</b>	<3%, TNE series stored at 25°C require a supplementary charge every six months, the charging interval would shrink when the ambient temperature went higher	

### Performance Curve


#### Discharge Characteristics ( 25°C )

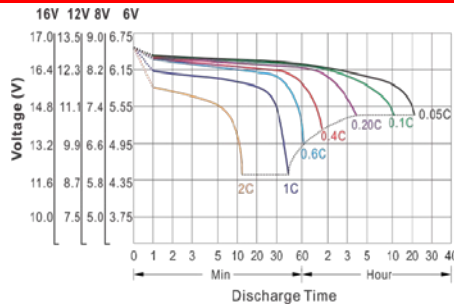

#### Charge Characteristics ( 25°C )

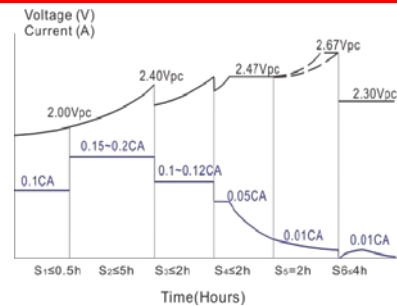

#### Cycle Lives With Depth Of Discharge

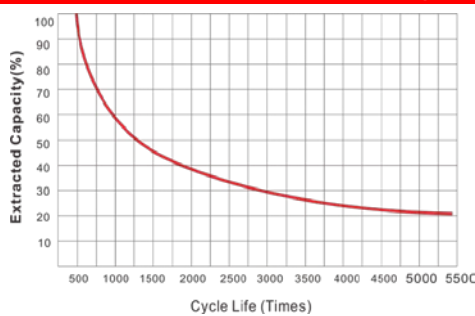

#### Self-Discharge Characteristics

