

TRLiF-1212P (12.8V12.0Ah)

Rechargeable Li-ion Battery-Industrial Battery-LFP Series



Product Features

- 


Cylindrical LFePO₄ cell-26650/32700 (3.2V 3.0~6.3Ah), higher reliability



**Longer cycle life
2000 cycles@100%DOD.**
- 

Fully replaceable with current batteries (Lead-acid, Ni-Cd)



Lithium iron phosphate technology, safe and reliable.
- 

**Maintenance free
50% lighter than lead acid batteries**



Optimum adaptation to variety applications with series & parallel expansion support

Product Application

- 
UPS
- 
Signal
- 
EPS
- 
Solar Power
- 
Base Station
- 
Electric Vehicle
- 
Other power supply

Nominal Characteristics

Nominal Voltage	12.8V
Nominal Capacity (@0.2C)	12.0Ah (4S2P)
Nominal Energy	153.6Wh
Internal Resistance	70mΩ
Self Discharge Rate	≤3.5% per month
Cycle Life (@25°C,0.2C,100%DOD)	2000 Cycles
Parallel Connected Function	No more than 2 groups in parallel
Series Connected Function	No more than 4 groups in series

Charging Specifications

Max. Charging Current	4.0~14.6V 6A
-----------------------	-----------------

Discharging Specifications

Discharging Cut-off Voltage	10.0V
Max. Discharging Continuous Current	12A
Max. Discharging Pulse Current	30A, <3S

TRLiF-1212P (12.8V12.0Ah)

Rechargeable Li-ion Battery-Industrial Battery-LFP Series




Mechanical Characteristics

Length	151mm
Width	98mm
Height	95mm
Total Height	101mm
Weight	Approx. 1.5Kg
Terminal	F2


Operating Conditions

Charge Temperature	0°C~45°C (32°F to 113°F)
Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Temperature	0°C to 45°C (32°F to 113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP55


Discharging curve at different rate @25°C

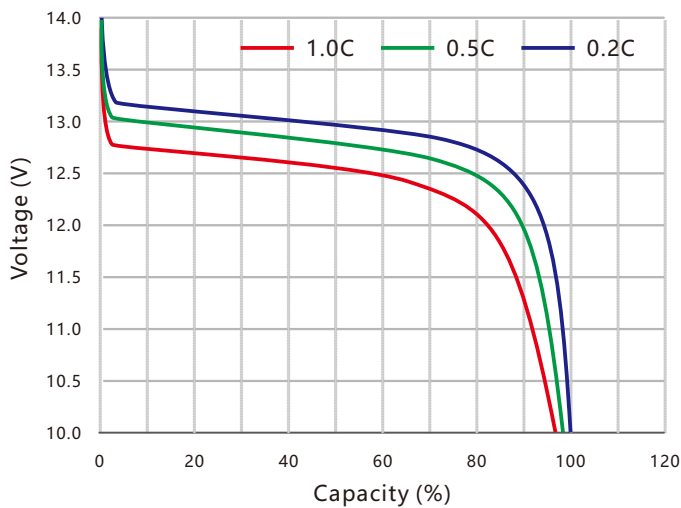

Charging Characteristic @25°C

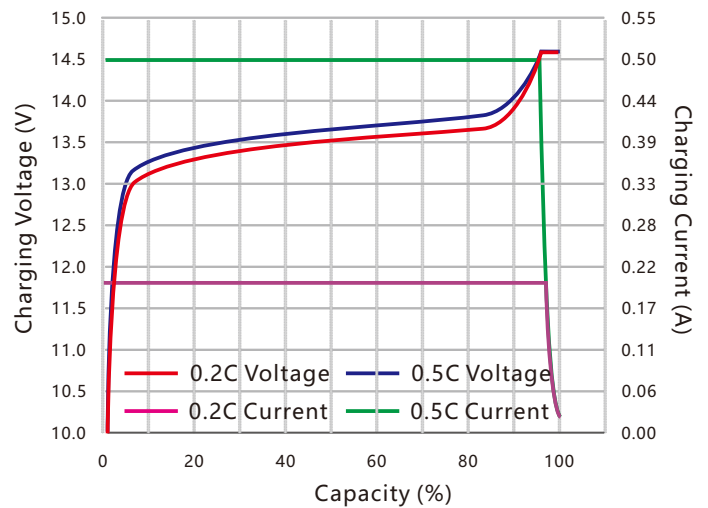

Capacity under different Temp.

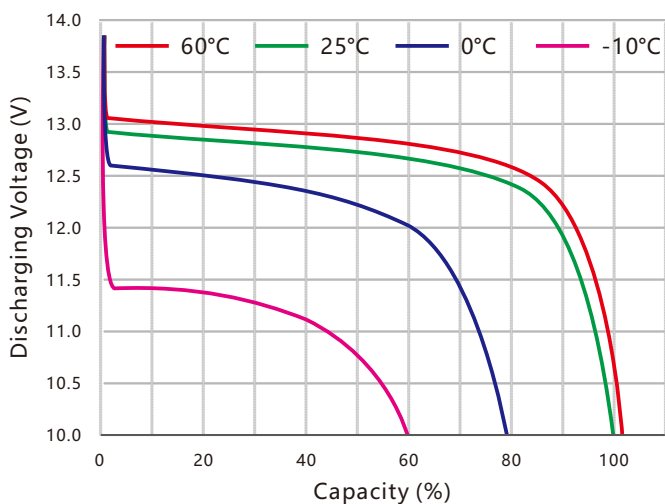

Cycle Life under different DOD@0.2C,25°C

