

# TRLiF-12150P (12V150Ah)








Rechargeable Li-ion Battery-Industrial Battery-LFP Series



## Product Features

-  **Cylindrical LFePO<sub>4</sub> cell-26650/32700 (3.2V 3.0~6.3Ah), higher reliability**
-  **Longer cycle life 2000 cycles@100%DOD.**
-  **Fully replaceable with current batteries (Lead-acid, Ni-Cd)**
-  **Lithium iron phosphate technology, safe and reliable.**
-  **Maintenance free 50% lighter than lead acid batteries**
-  **Optimum adaptation to variety applications with series & parallel expansion support**

## Product Application

-  **UPS**
-  **Signal**
-  **EPS**
-  **Solar Power**
-  **Base Station**
-  **Electric Vehicle**
-  **Other power supply**

## Nominal Characteristics

Nominal Voltage	12.8V
Nominal Capacity (@0.2C)	150Ah (4S25P)
Nominal Energy	1920Wh
Internal Resistance	40mΩ
Self Discharge Rate	≤3.5% per month
Cycle Life (@25°C,0.2C,100%DOD)	2000 Cycles
Parallel Connected Function	No more than 2 groups in parallel
Series Connected Function	No more than 4 groups in series

## Charging Specifications

Recommended Charging Voltage	14.0~14.6V
Max. Charging Current	75A

## Discharging Specifications

Discharging Cut-off Voltage	10.0V
Max. Discharging Continuous Current	100A
Max. Discharging Pulse Current	200A, <3S

# TRLiF-12150P (12V150Ah)

Rechargeable Li-ion Battery-Industrial Battery-LFP Series




## Mechanical Characteristics

Length	483mm
Width	170mm
Height	240mm
Total Height	240mm
Weight	Approx. 19.2Kg
Terminal	M8


## Operating Conditions

Charge Temperature	0°C~45°C (32°F to 113°F)
Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Temperature	0°C to 45°C (32°F to 113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP55


## Discharging curve at different rate @25°C

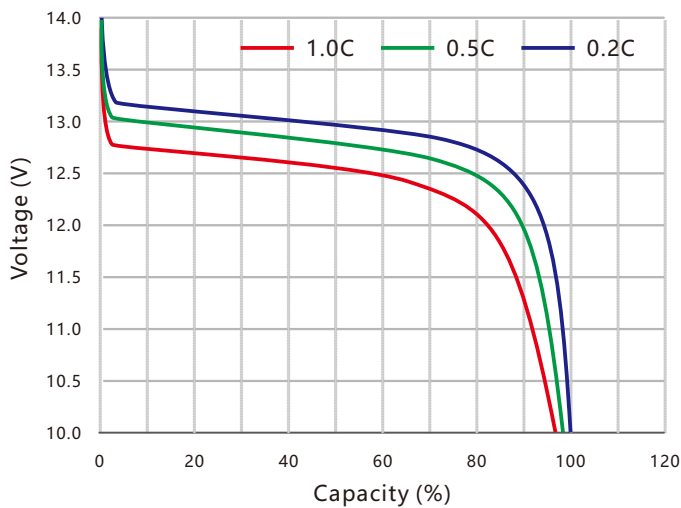

## Charging Characteristic @25°C

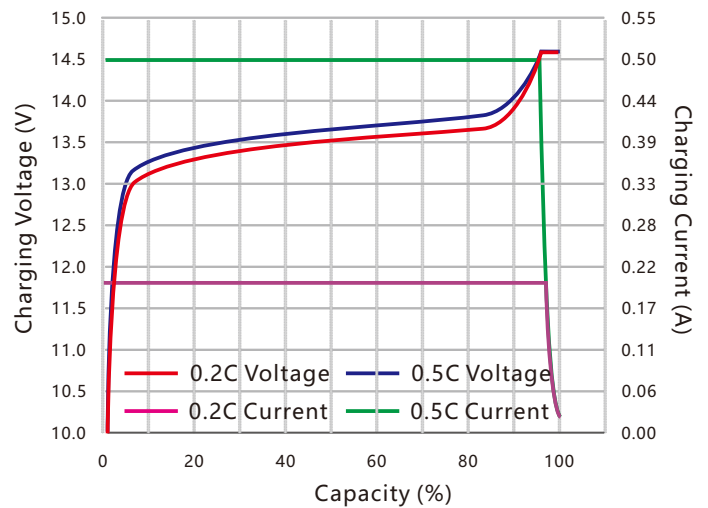

## Capacity under different Temp.

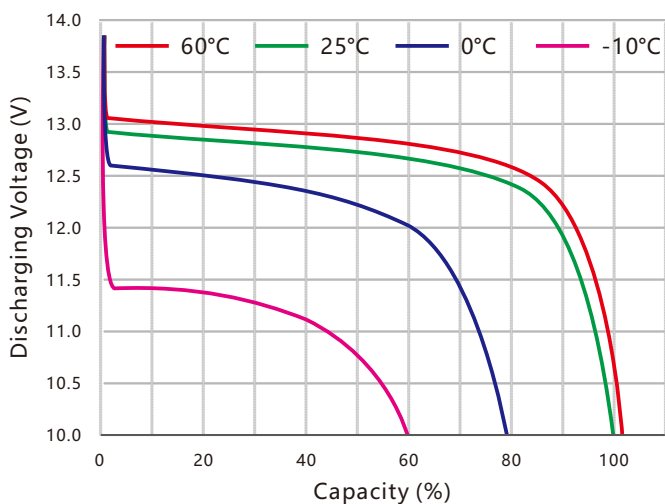

## Cycle Life under different DOD@0.2C,25°C

